



Load Lifter Manufacturing Ltd.

3 Anderson Blvd., Stouffville
Ontario, Canada L4A 7X4

Phone: 905-642-9756
Fax: 905-640-1437
Toll Free: 1-800-265-5438

www.load-liftermfg.com

Distributed By:

**LOAD LIFTER FEATURES
DO WORK FOR YOU**

AGRI-LIFTER SERIES



Features

- 4-5,000 LB Lift Capacity
- Full Range of C-Thru Masts
- Roomy, Isolated Operators Compartment
- Easy On & Off Access
- Rugged, Reduced Weight Design
- Low Ground Pressure
- Range of Turf Industry Attachments Available
- Optional Flotation Tires Available
- Two & Four Wheel Drive
- Heavy Duty Steer Axles
- North American Manufactured

Dimensions

	Agri-Lifter
Ground Clearance	12"
Length to Face of Forks	143"
Height to Top of Canopy	97"
Turn Radius	2WD-164" 4WD-175"
Width	84"

LABORER SERIES



Features

- 6-10,000 LB Lift Capacity
- Lift Heights to 18 Feet
- Compact, Maneuverable Design
- Low Profile
- High Visibility, C-Thru Roller Masts
- Free Lift, & Non Free Lift Designs
- Roomy, Isolated Operators Module
- Heavy Duty, Componentized Power Train
- Two & Four Wheel Drive
- Available Poultry Package
- North American Manufactured

Dimensions

	Laborer	LO-PRO
Ground Clearance	9"	7.5"
Length to Face of Forks	6K-126.75" 8K-134.5" 10K-135.75"	6K- 126.75" 8K-134.5" 10K-135.75"
Height to Top of Canopy	84.5"	78.5"
Turn Radius	2WD-143" 4WD-158"	2WD-143" 4WD-158"
Width	6K-68" 8-10K-73.75"	73.75"

TOW TRACTOR



Features

- 15,000 LB Hitch Lift Capacity
- 36 Inch Hitch Lift Height
- Multiple Hitch Options
- Large Isolated Operators Module
- Ergonomic Controls
- Excellent Sight Lines
- Available, Wide View Mirrors
- Standard 4 Speed Power Shift Transmission
- Hydraulic, Oil Immersed Disc Brakes
- Two & Four Wheel Drive
- North American Manufactured


Dimensions

	Tow Tractor
Ground Clearance	10"
Length to Ball Mount	149.75"
Height to Top of Canopy	97"
Turn Radius	2WD-170" 4WD-175"
Width	88"

ATTACHMENTS



- Hydraulic and Manual Buckets
- Standard 2, 3 & Quad C-Thru Masts
- Free-Lift Masts
- Heavy Duty Truss Masts
- Negative Lift (Marina) Masts

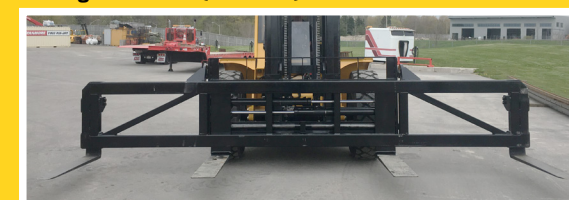

- Fork Positioners and Spreader Bars
- Salvage Yard and Lumber Forks
- Engineered Fork Extensions
- Pipe and Log Grapples
- Load Hold Downs



- Twin Pak Dual Skid Loading System
- Fork Mounted Jibs and Cranes
- Drum Clamps
- Load Rotators
- Big Roll Turf Attachment
- Heavy Duty Mortar Mixers
- Hydraulic and Manual Snow Blades



ROUGH TERRAIN FORKLIFTS



**LOAD LIFTER FEATURES
DO WORK FOR YOU**

1056-G REACH



Features

- 10,000 LB Lift Capacity
- Lift Height to 56 Feet, Forward Reach of 42 Feet 3 Inches
- 360 Degree Operator Visibility
- ROPS, FOPS Ergonomic Operators Module
- Single Joystick Control
- Smooth, Responsive Hydraulics
- High Strength, 4 Section Boom Assembly
- Standard Pro-Attach System
- Frame Level Capability With Stabilizers Down
- Stable, Highly Maneuverable Design
- North American Manufactured

Specifications

	1056-G
Ground Clearance	17"
Length to Face of Forks	277"
Height to Top of Canopy	99"
Turn Radius	180"
Width	102"
Load at Max. Height (Stabilizers Down)	6,000 lbs.
Load at Max. Height (Stabilizers Up)	4,000 lbs.
Load at Max. Reach (Stabilizers Down)	3,000 lbs.
Load at Max. Reach (Stabilizers Up)	450 lbs.

842-G REACH



Features

- 8,000 LB Lift Capacity
- Lift Height to 42 Feet, Forward Reach of 28 Feet 2 Inches
- 360 Degree Operator Visibility
- ROPS, FOPS Ergonomic Operators Module
- Low Profile Machine Stance
- Single Joystick Control
- Smooth, Responsive Hydraulics
- High Strength, 3 Section Boom Assembly
- Standard Pro-Attach System
- Stable, Highly Maneuverable Design
- North American Manufactured

Specifications

	842-G
Ground Clearance	15.75"
Length to Face of Forks	218"
Height to Top of Canopy	89"
Turn Radius	165"
Width	101.5"
Load at Max. Height	6,000 lbs.
Load at Max. Reach	1,800 lbs.

642-G REACH



Features

- 6,000 LB Lift Capacity
- Lift Height to 42 Feet, Forward Reach of 28 Feet 2 Inches
- 360 Degree Operator Visibility
- ROPS, FOPS Ergonomic Operators Module
- Low Profile Machine Stance
- Single Joystick Control
- Smooth, Responsive Hydraulics
- High Strength, 3 Section Boom Assembly
- Standard Pro-Attach System
- Stable, Highly Maneuverable Design
- North American Manufactured

Specifications

	642-G
Ground Clearance	15.75"
Length to Face of Forks	218"
Height to Top of Canopy	89"
Turn Radius	165"
Width	101.5"
Load at Max. Height	6,000 lbs.
Load at Max. Reach	1,000 lbs.

518 REACH



Features

- 5,500 LB Lift Capacity
- Lift Height to 18 Feet 4 Inches, Forward Reach of 10 Feet 11 Inches
- Low Profile Stance
- Excellent Operator Visibility
- Roomy, Ergonomic Operators Module
- Compact, Maneuverable Design
- Tight Turning Radius
- Advanced Hydraulic System
- Standard Pro-Attach System
- Full Range of Attachments
- North American Manufactured

Specifications

	518
Ground Clearance	10.8"
Length to Face of Forks	150.4"
Height to Top of Canopy	75.6"
Turn Radius	127"
Width	71.5"
Load at Max. Height	4,400 lbs.
Load at Max. Reach	1,850 lbs.

2200/2400 SERIES



Features

- 6-20,000 LB Lift Capacity
- Lift Heights to 30 Feet
- Full Range of C-Thru Roller Masts
- Free Lift & Non Free Lift Designs
- Wide Selection of Attachments
- Industry Leading Visibility
- Large Operators Compartment
- Componentized Power Train
- Hydraulic, Oil Immersed Brakes
- Availability in Two & Four Wheel Drive
- North American Manufactured

Dimensions

	6-12K	15K	18-20K
Ground Clearance	12"	12"	12"
Length to Face of Forks	6-10K-152.25" 12K-156.25"	174"	192.5"
Height to Top of Canopy	97"	97"	101.5"
Turn Radius	2WD-168" 4WD-175"	192"	240"
Width	84"	91"	100"

4400 SERIES



Features

- 5-30,000 LB Lift Capacity
- Lift Heights to 30 Feet
- Large Range of Attachments
- High Visibility, Isolated Operators Module
- Full Time Four Wheel Drive
- Four Wheel, Two Wheel, Crab Steering
- Large Equal Wheels
- Componentized Power Train
- Standard 3 & 4 Speed Power Shift Transmissions
- High Strength, Welded Chassis
- North American Manufactured

Dimensions

	10-16K	18-20K	25-30K
Ground Clearance	13"	14"	25K-13.5" 30K-11.5"
Length to Face of Forks	181"	209"	25K-242.75" 30K-280"
Height to Top of Canopy	107"	124"	25K-134.5" 30K-138"
Turn Radius	174"	192.5"	25K-244" 30K-247"
Width	96"	102"	25K-98" 30K-110"